


# WADE-8066

Leading Intel® Core™ 2 Duo processor based Mini-ITX Board with Dual Displays and Two GbE

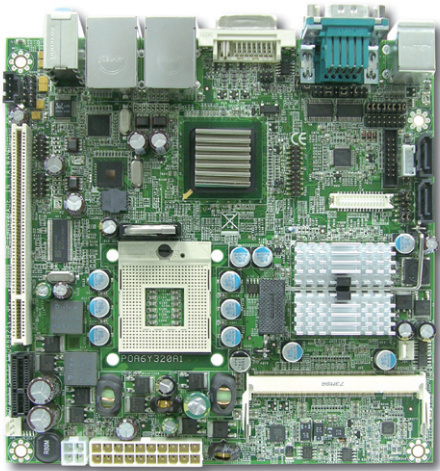

## FEATURES

- Intel® Core™ 2 Duo processor
- Intel® GME965 Chipset
- Max. DDR2 4GB memory in dual SO-DIMM sockets
- Dual PCI Express x1 interface Gigabit Ethernet ports
- One PCI Express x4 and one PCI expansion slot via riser card
- Dual Display by VGA/LVDS/DVI/TV-Out

Built with Intel® latest mobile chipset GME965, WADE-8066 takes advantage of Intel® Core™ 2 Duo technologies. The graphic media accelerator X3100 provides both fast video response time and high quality images via the two-channel

memory architecture. WADE-8066 supports dual display by VGA, DVI, LVDS and TV-Out. With its display-enriched interface, WADE-8066 can support various multimedia devices.

### SYSTEM

CPU	Intel® Core™ 2 Duo and Intel® Celeron® M processor (Socket P)
FSB	FSB 800/533 MHz
BIOS	Award BIOS
System Chipset	Intel® GME965 & ICH8ME
System Memory	2 x 200-pin dual channel DDR2 SDRAM DIMM 533/667 MHz supports up to 4 GB
Storage	2 x Serial ATA connector high-speed data transfers at up to 3 Gb/s
SSD	1 x Compact Flash
Watchdog Timer	Reset; 1 sec.~255 min. and 1 sec. or 1 min./step
H/W Status Monitor	Monitoring system temperature, voltage, and cooling fan status. Auto throttling control when CPU overheats
GPIO	On-board programmable 16 Digital I/O interface
Expansion	One PCI slot and One PCI-E x4 slot via riser card

### I/O

MIO	1 x RS-232, 1 x RS-232/422/485 selectable, 1 x K/B, 1 x Mouse, 2 x GbE
IrDA	IrDA 1.0
USB	4 x USB 2.0 ports and 4 x USB 2.0 with header
Audio Interface	Mic in, Line in, Line out, High Definition Audio 5.1 channel
Ethernet Interface	IEEE 802.3 10/100/1000BASE-T Gigabit Ethernet compliant


### DISPLAY

Chipset	Intel® GME965 Integrated GMA x3100 Graphics device
Display Memory	Intel® DVMT 4.0 supports up to 384 MB video memory
Resolution	Analog Display: Up to 2048 x 1536 (QXGA) Digital DVI Display: Up to 1600 x 1200 (UXGA)
LVDS	Dual Channel 24-bit

### MECHANICAL & ENVIRONMENTAL

Power Requirement	TBD
Operating Temperature	0~55°C
Operating Humidity	0%~90% relative humidity, noncondensing
Size (L x W)	6.69" x 6.69" (170 mm x 170 mm)
Weight	0.94 lbs (0.43 Kg)

## REAR I/O

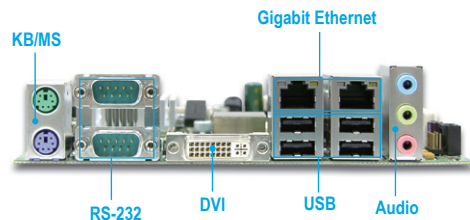

## ORDERING GUIDE

- **WADE-8066**  
Intel® Core™ 2 Duo and Celeron® M processors Main Board with DVI, Audio, GbE LANs, 8 x USB 2.0
- **PEP-581R/582R**  
One/Two slots PCI riser card
- **PEP-592R**  
One PCI and one PCI-E x4 slot riser card
- **PER-4210R**  
One slot PCI-E x4 riser card
- **B9970540**  
1U active heatsink